




Guzzler® Electric Pump GE-2600A

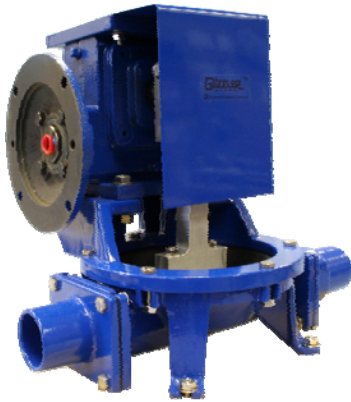

- **13.4 GPM**
- Available in aluminum (GE-2600A) or bronze (GE-2600B)
- Accommodates 1-1/4" - 2" hose
- Both AC (115V, 220V) and DC (12V, 24V) motors available
- Also available with Gear Reducer only + Motor-ready NEMA 56-C flange

Specifications / Options

Body & Ports *	Epoxy-coated Aluminum (Blue), Epoxy-coated Bronze (Bronze)
Clamp Ring	Aluminum or Bronze Motor Mounting Plate
Valves *	Buna-N Flapper w/molded steel reinforcement plate
Diaphragm *	Buna-N Double Sided
Clevis/Button Assembly *	Stainless Steel
Motor	115 VAC, 220 VAC, 12 VDC, 24 VDC, Gear Reducer + NEMA 56-C motor ready flange

* In contact with fluid

Available Motors

Volts	RPM	Input HP	Torque (In-Lbs)	Full Load Amps	Weight (Lbs)
115 VAC	1725	1/2	24.0	8.8	19
110/220 VAC	1425	1/2	22.0	7.6/3.8	26
12 VDC	1800	1/2	17.5	39.0	29
24 VDC	1800	1/2	17.5	20.0	29

Performance

Flow Rate	Per minute ¹ : 13.4 Gal (50.5 L) Per stroke: 0.89 Qt (0.84 L)
Max Lift	15 ft (4.6 m)
Max Head	12 ft (3.7 m)
Max Pressure	20 psi (1.4 kg/cm ²)
Max Service Temp	190°F (88°C)

¹ @ 60 cpm, 0 lift, 0 head

Available Ports

	in	1-1/4	1-1/2	2
	cm	3.18	3.81	5.08
Hose (Smooth)				S
NPT Female (Tapped)		•		
NPT Male (Threaded)			•	

S Standard • Optional

Valve Options





Flapper — General purpose liquid transfer. Features molded steel reinforcement plate.

Pump Performance Curves

Not Currently Available

Use of a Guzzler Check Valve can double the pump's effective lift or head

Note: Dimensions shown below are for pump equipped with gear reducer and motor-ready flange only.

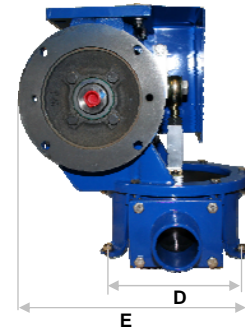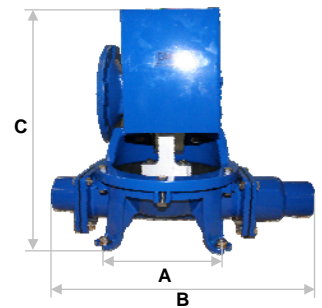

	in	cm
A	5-3/4	14.6
B	14-3/4	37.5
C	12	30.5
D	6-3/8	16.2
E	11-1/2	29.2
Mounting Holes	1/4	0.64
Weight (Aluminum)	35.85 lb	16.2 kg
Weight (Bronze)	44.15 lb	20.0 kg

Guzzler® Electric Pump GE-2600



Example: GE-2600A-012-38-9090-0A

- Guzzler Electric Pump
- Model style #2600A: Aluminum Body, Opposite Side Ports
- Buna-N Flapper Valves
- Buna-N Double-Sided Diaphragm
- Stainless Steel Clevis/Button Assembly
- Motor Mounting Plate Clamp Ring
- Inlet: 2" Smooth
- Outlet: 2" Smooth
- Gear Reducer & NEMA-C Motor-ready Flange



Guzzler Product	
Option	Code
Hand Pump	GH

Speed Control	
Option	Code
None	-0

Diaphragm	
Option	Code
Buna-N Dbl Sided	2

Clamp Ring	
Option	Code
Motor Mounting Plate	8

Motor	
Option	Code
Gear Reducer & Motor-ready NEMA Flange	-0A
115 VAC Motor	-0H
220 VAC Motor	-0J
12 VDC Motor	-0K
24 VDC Motor	-0L

GE -2600A -0 1 2 -3 8 -90 90 -0A

Style (Family)	
Option	Code
Aluminum, Opp. Side Ports	-2600A
Bronze, Opp. Side Ports	-2600B

Valves	
Option	Code
Flapper (Buna-N)	1

Clevis/Button Assembly	
Option	Code
Stainless Steel	-3

Hose Connections		
Option	Code	
	Inlet	Outlet
1-1/4" NPT Tapped	-71	71
1-1/2" Smooth	-80	80
1-1/2 NPT Threaded	-82	82
2" Smooth	-90	90

