



Model 17850-0012

ENGINE OIL CHANGE SYSTEM

FEATURES

- Pump Body: Polypropylene
- Diaphragm: Geolast, oil resistant
- Valves: Viton™*, oil resistant
- Motor: 12V DC with integral power switch
- Receiver: Plastic with 10 quart capacity bucket
- Battery Leads: 7 feet with alligator clips
- Suction Tube: 8 feet, oil & heat resistant
- Dimensions: 12-3/8" (314mm) diameter,
12-3/4" (324mm) high
- Weight: 3.5 lb (1.6 kg)




Model 17850-0012

OPERATING INSTRUCTIONS

1. Run the engine approximately 5 minutes to heat oil (minimum oil temperature 140°F; maximum 185°F), then shut off engine prior to oil removal.
2. Insert 1/4" tube into pump inlet port and be sure that it is securely in place.
3. With the pump switch in the off position (to avoid sparks), clamp the power-leads' alligator clips to a 12V DC battery (red to positive; black to negative).
4. With the engine off, remove the dipstick, and insert the 1/4" oil change probe through the dipstick tube until it contacts the bottom of the oil pan. It may help to measure the probe against the dipstick, add an inch and mark the probe. Do not push the probe too far into the dipstick tube or it may curl up and out of the oil. It may be useful to tape the probe in place during evacuation.
5. To evacuate the oil, switch on the pump using the rocker switch at the rear of the motor. Watch for flow in the probe. If no flow appears in 15 seconds, check the probe for sediment blockage. Clean the probe and reset it 1/4" off the pan bottom.
6. The pump will speed up when the oil has been removed. Normal 5-quart pump out takes about 10 minutes.
7. Switch off pump before removing alligator clips from the battery, to avoid sparks.
8. Remove probe from dipstick tube while wiping with a rag to prevent oil drips.
9. To empty the container, pull up the retractable pour spout and pour the oil into a suitable container for disposal/recycling.


NOTICE: Always recycle used oil in compliance with federal and local legislation. Handle petroleum products in an environmentally responsible manner.

| Model Number | Voltage | Amp Draw | Fuse Size |
|--------------|---------|----------|-----------|
| 17850-0012 | 12 | 4 | 5 |

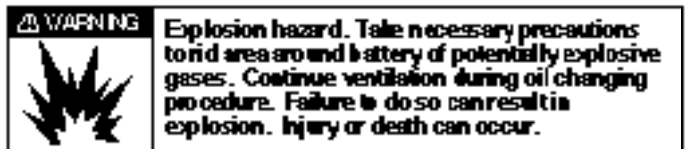


* Viton is a registered trademark of du Pont de Nemours & Co.

Four simple steps to fast, clean oil changes

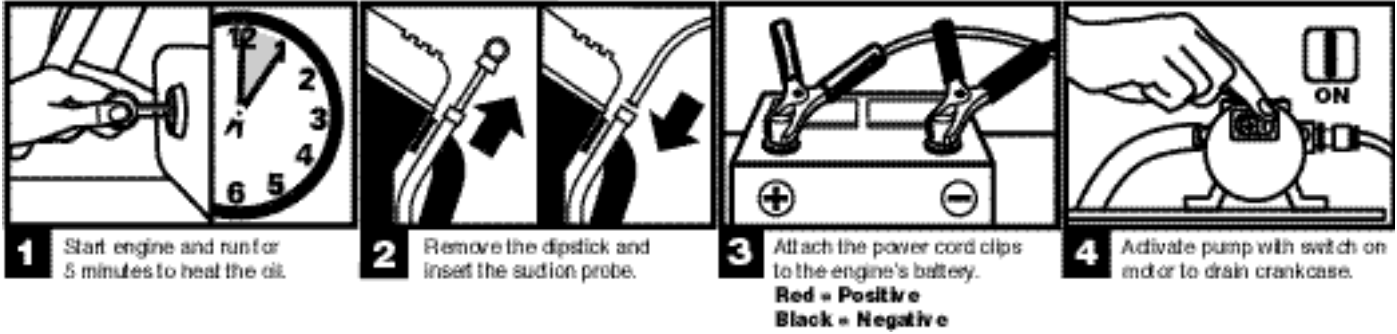

WARNING

Burn Hazard. Heated oil can cause burns. Wear protective gloves, clothing and safety glasses during the oil change process. Failure to do so may result in personal injury.

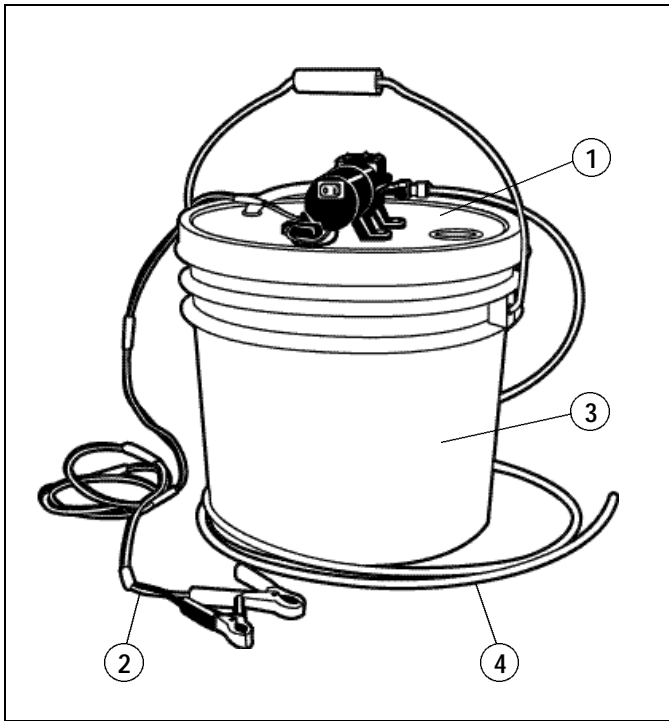

| Key | Description | Qty. | Part Number |
|-----|----------------|------|-------------|
| 1 | Lid | 1 | 17794-0000 |
| 2 | Power Cord | 1 | 43922-0000 |
| 3 | Pail | 1 | 17089-0000 |
| 4 | Dipstick Probe | 1 | 18753-0608 |

Jabsco



U.S.A.
Jabsco
20 Icon
Foothill Ranch, CA 92610-3000
Tel: 949.609.5106
Fax: 949.859.1254

UNITED KINGDOM
Jabsco
Bingley Road, Hoddesdon
Hertfordshire EN11 0BU
Tel: +44 (0) 1992 450145
Fax: +44 (0) 1992 467132

CANADA
Fluid Products Canada
55 Royal Road
Guelph, Ontario N1H 1T1
Tel: (519) 821.1900
Fax: (519) 821.2569

JAPAN
NHK Jabsco Company Ltd.
3-21-10, Shin-Yokohama
Kohoku-Ku, Yokohama, 222
Tel: 045.475.8906
Fax: 045.475.8908

GERMANY
Jabsco GmbH
Oststrasse 28
22840 Norderstedt
Tel: +49-40-53 53 73 -0
Fax: +49-40-53 53 73 -11

THE PRODUCTS DESCRIBED HEREIN ARE SUBJECT TO THE JABSCO ONE YEAR LIMITED WARRANTY, WHICH IS AVAILABLE FOR YOUR INSPECTION UPON REQUEST.