

DESCRIPTION & OPERATION: Series 893 are centrifugal magnetic drive pumps. The 893-13 and 893-14 pumps are hermetically encapsulated which allows the pump to be run fully submerged, and the pumps can only be used submerged in the liquid. A flooded suction is essential for operation since the pump is not self-priming. Pumps cannot be run dry because the impeller requires the liquid being pumped for lubrication. For application assistance, contact March Pump.

ELECTRICAL: The Brushless Motors have voltage protection. Red lead is positive, black lead is negative.

Model 893-13 (12 VDC) starts at 5.5 V \pm ≈0.5 V and turns off at 17.5 V \pm ≈0.5 V.


Model 893-14 (24 VDC) starts at 8.5 V $\pm \approx$ 0.5 V and turns off at 28 V $\pm \approx$ 0.5 V.


Specifications		893-13 (12V DC)	893-14 (24V DC)		
Product	P/N	0893-0072-0100	0893-0073-0100		
Inlet-Outlet		3/8'FPT-3/8"OD	3/8'FPT-3/8"OD		
Max Internal Pressure		50PSI (344 kPa)	50PSI (344 kPa)		
Max Liquid Temperature	Submerged	120F (49C)	120F (49C)		

max ziquid Temperature	o arbitici	800	120: ((.5 0)		120. ((1.5.6)
	Max	Flow	Max Head			Electrical				Packed Weight	
Model	GPM	LPM	FT	PSI	М	Voltage	Amps	HP	kW	RPM	Pounds
893-13	2.7	11	10.6	4.5	3.3	12	0.85	1/150	0.004	4000	1.5
893-14	2.7	11	10.6	4.5	3.3	24	0.5	1/150	0.004	4000	1.5

All specifications & data are based on pumping water & are intended as a guideline only. Specifications may vary with different motors.

893 Brushless Paragon Motor w/Voltage Protection 893-13 & 893-14

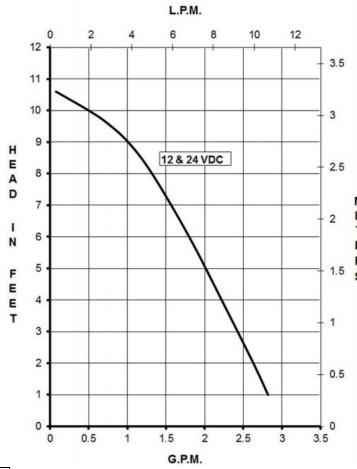

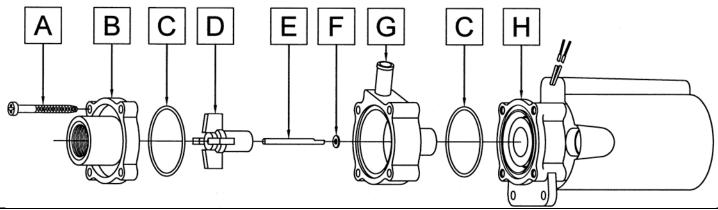

	NOTE NOTE								
893-13 (12V DC)					893-14 (24V DC)				
Item	Part Number	QTY REQ	Description	Item	Part Number	QTY REQ	Description		
Α	0115-0062-1000	4	#7-19 x 1-7/16" Long Self-Tapping Screw (Stainless)	Α	0115-0062-1000	4	#7-19 x 1-7/16" Long Self-Tapping Screw (Stainless)		
В	0893-0004-1000	1	3/8" FPT Inlet Cover (Noryl)	В	0893-0004-1000	1	3/8" FPT Inlet Cover (Noryl)		
С	0115-0018-1000	1	1/16" CS x 1-7/16" OD "O" Ring (Buna N)	С	0115-0018-1000	1	1/16" CS x 1-7/16" OD "O" Ring (Buna N)		
D	0115-0119-1000	1	Encapsulated Impeller (Polypropylene)	D	0115-0119-1000	1	Encapsulated Impeller (Polypropylene)		
E	0115-0032-1000	1	Shaft (316 Stainless)	E	0115-0032-1000	1	Shaft (316 Stainless)		
F	0115-0033-1000	1	Rear Thrust Washer (Carbon/Teflon)	F	0115-0033-1000	1	Rear Thrust Washer (Carbon/Teflon)		
G	0893-0003-1000	1	3/8" OD Outlet Rear Housing (Noryl)	G	0893-0003-1000	1	3/8" OD Outlet Rear Housing (Noryl)		
Н	0893-0074-0100	1	Epoxy Sub Assembly 12V DC	Н	0893-0075-0100	1	Epoxy Sub Assembly 24V DC		
	•		r materials and/or parts not listed. lable upon special order.						

Materials in contact with the liquid:

Noryl, Polypropylene, Carbon/Teflon, Buna N, 316 Stainless Steel, Epoxy, Delrin, Motor Leads

LIMITED WARRANTY: March pumps are guaranteed only against defects in workmanship or materials for a period of one year from date of manufacture pumping water. For the complete warranty and to register online go to www.marchpump.com/ warranty-registration