



Low Cost Water System Protection!



Jabsco Water Pressure Regulators

Designed for day and night protection of the entire plumbing system from unregulated city water system hook-ups. Whether connected to a dock-side main or a campground faucet, the new Jabsco Regulator will maintain regulated output at low or high flow rates. The removable strainer protects valves and seal-seats from pipe scale and other debris.

FEATURES

- Reduces unregulated city water pressures that can run as high as 125 psi down to a safe 45 psi - automatically
- Features built-in backflow preventer. Federal and State required on RV's with water service hookup
- Built-in port strainer is easily cleanable




FLUSH MOUNT MODEL 4441 I-SERIES

Permanent City Water Pressure Regulator and City Water Entry

FEATURES

- Flush mounts permanently in vessel super structure
- Easily replaces most original city water entries
- Automatic pressure regulation
- Built-in backflow preventer
- Easy cleaning strainer
- Dust cap

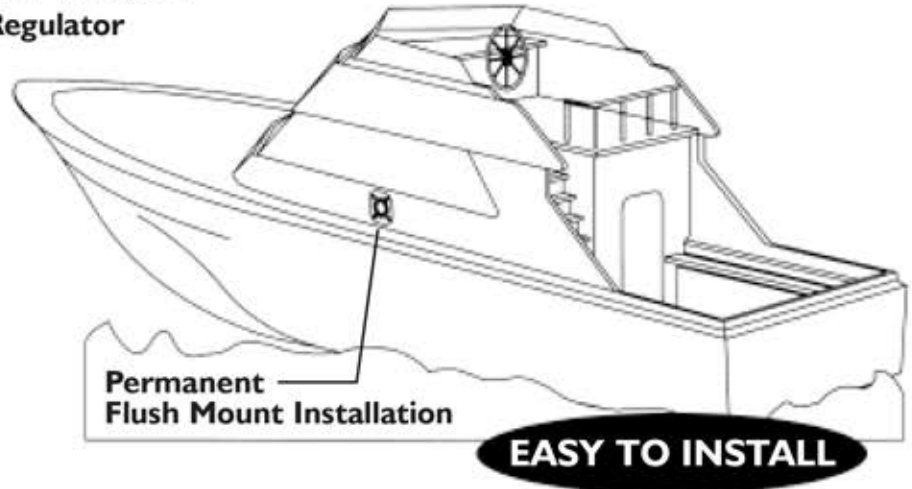

Specifications:

Water pressures from 46-125 psi (3-10 bar) will be regulated down to 45 psi (3 bar). Lower pressures will pass through unregulated. Variance is ± 5 psi (0.3 bar).

Fitting:

Flush, 3/4 GHT(f) inlet and 1/2"-14 pipe 90° swivel-elbow outlet.
Inline, 3/4 GHT(f) inlet and 3/4 GHT(m) outlet.

Materials:

UV-resistant plastic, crack resistant mounting flange.

Working Temperature:


33-150°F (1-65°C).

Weight:

Inline, 0.2 lb. (0.1 kg).
Flush, 0.4 lb. (0.2 kg).

MODEL NUMBER:

- 4441 I-0045 In-line, white, 45 psi (3.1 bar)
4441 I-1045 Flush mount, white 45 psi (3.1 bar)
4441 I-2045 Flush mount, chrome 45 psi (3.1 bar)

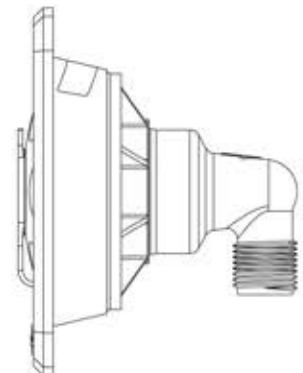

IN-LINE MODEL ALSO AVAILABLE

www.jabsco.com

USA
Jabsco
666 E Dyer Road
Santa Ana, CA 92705
Tel: 714-557-4700
Fax: 714-628-8478

UK
Jabsco
Bingley Road, Hoddesdon
Hertfordshire EN11 0BU
Tel: +44 (0) 1992 450145
Fax: +44 (0) 1992 467132

JAPAN
NHK Jabsco Company Ltd.
3-21-10, Shin-Yokohama
Kohoku-Ku, Yokohama, 222
Tel: 045 475 8906
Fax: 045 475 8908

GERMANY
Jabsco GmbH
Osistrasse 28
22840 Norderstedt
Tel: +49-40-53 43 73 -0
Fax: +49-40-53 53 73 -11

ITALY
Jabsco Marine Italia S.r.l.
Via Tommaso, 6,
20059 Vimercate, Milano
Tel: +39 039 6852323
Fax: +39 039 666307

Warning: All products of the company are sold and all services of the company are offered subject to the company's warranty and terms and conditions of sale, copies of which will be furnished upon request. The information provided herein is for guidance only, it does not constitute a guarantee of performance or specification of any individual product or component.



Water Pressure Regulators

Water Pressure Regulators protect your boat's water system from damaging pressures of unregulated city water hook-ups. Available in two models - permanently installed flush mount or in-line. Both feature brass GHT fittings for potable garden hose connection.

- Limits inlet water pressure to 45 psi (3.1 bar).
- Maintains regulated pressure at various flow rates.
- Compact in-line model only 3" (77mm) long.
- Flush model has unique swivel elbow output.
- Manufactured of food-grade materials.
- Meets all applicable codes and approvals.
- Removable strainer protects plumbing.

Fitting: Flush connections for $\frac{3}{4}$ " GHT (f) inlet and $\frac{1}{2}$ "-14 pipe outlet.

In-line connections $\frac{3}{4}$ " GHT (f) inlet and $\frac{3}{4}$ " GHT (m) outlet.

Flush size: $3\frac{1}{2}$ " deep x $4\frac{3}{8}$ " high x $4\frac{3}{8}$ " wide (88mm x 13mm x 13mm).

In-line size: 3" long x $1\frac{1}{2}$ " diameter (7.7cm x 3.9cm).

Weight: Flush 0.41lb (0.2 kg).
In-line 0.21lb (0.1kg).

44411-0045 In-line, White 45 psi (3.1 bar).

44411-1045 Flush, White 45 psi (3.1 bar)- 90 degree threaded outlet.

44411-2045 Flush, Chrome 45 psi (3.1 bar) - 90 degree threaded outlet.

44412-1045 Flush, White 45 psi (3.1 bar) – regulator outlet accepts snap-fit port fittings.

44412-2045 Flush, Chrome 45 psi (3.1 bar) – regulator outlet accepts snap-fit port fittings.